



## TBK-PP Directional Drilling Kit

Polypropylene Multi-Layer Sleeve System For Directional Drilling


Canusa-CPS is a leading manufacturer of specialty pipeline coatings which, for over 30 years, have been used for sealing and corrosion protection of pipeline joints and other substrates. Canusa high performance products are manufactured to the highest quality standards and are available in a number of configurations to accommodate your specific project applications.

### Product Description

The Canusa-CPS TBK-PP Field Joint Coating System uses high performance polypropylene technology to provide superior mechanical and corrosion protection of field joints on 2 and 3-layer PE, PP and FBE coated pipelines in directional drilling applications. The system consists of a polypropylene-based primary heat-shrinkable sleeve to provide effective corrosion protection to the joint and superior mechanical protection for the forces encountered during the pull-through operation; and a secondary heat-shrinkable sleeve, which functions as a sacrificial wear cone. Canusa-CPS offers a range of TBK-PP products designed for pipeline operating temperatures up to 130°C (266°F). The system is fully compatible with cathodic protection systems, resists cathodic disbondment and is designed for a wide range of operating temperatures.

### Key Product Advantages

- PP Construction provides superior resistance to impact and abrasive forces over reinforced PE sleeves.
- The toughest Heat-Shrink Sleeve system available!
- Proven Force Cured Epoxy allows 'pre-inspect' providing assurance that pipe is fully protected.
- No internal reinforcement system required, eliminating the possibility of moisture absorption.
- Unique adhesive technology allows for low preheat temperatures and for a superior bond directly to the factory coating, sealing out moisture.

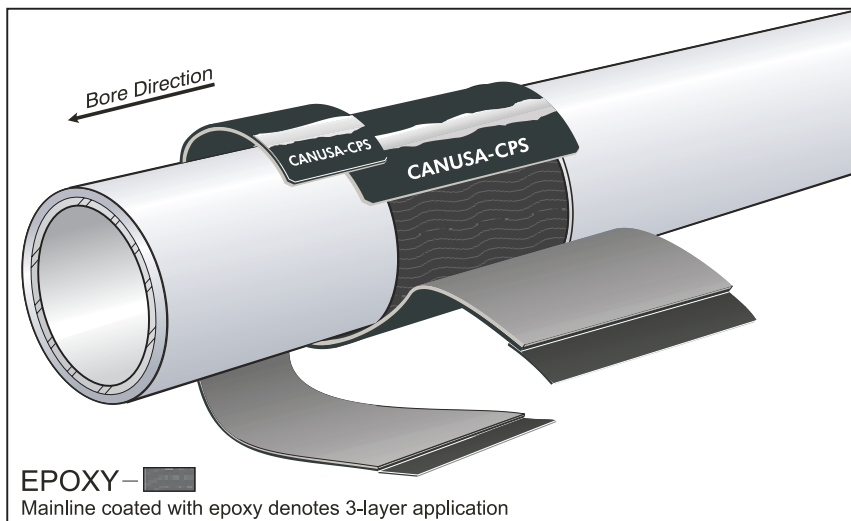

### Features & Benefits

#### Superior Abrasion Resistance

The polypropylene composition, including cross-linked polypropylene backing, provides superior resistance to impact and indentation, stiffness, hardness, and overall mechanical strength and abrasion resistance. These properties are ideally suited to the rigorous forces encountered during directional drilling applications and are vastly superior to all PE-based systems. The included sacrificial wear-cone provides added protection to the leading edge of the sleeve.

#### Superior Force Cured Epoxy Method

Canusa-CPS' proven method of force curing the epoxy primer to the steel allows the installer to 'pre-inspect' the joint prior to sleeve application. The epoxy will not be displaced during the aligning and shrinking stages of the sleeve installation. This provides the assurance that the pipe is fully protected. Canusa's epoxy primer can be applied to an even, nominal thickness for maximum corrosion protection.

#### Unique Adhesive Technology

Canusa-CPS' unique adhesive technology allows for low installation pre-heats and superior bonding to PP and PE coatings. Canusa-CPS' adhesives have been formulated to bond directly to the main line coating; epoxy is applied to the steel only. The result is a superior bond to the substrate, easier application and significant cost savings.

### Applications



Oil & Gas



Water Pipelines



Directional Drilling



Girth-Weld Joints



Polypropylene

### Configurations



2-Layer



3-Layer



Force-Cure Epoxy



Multi-Sleeve Kit



Wrapid Sleeve™

### Pipe Sizes



55-1520 (2"-60")

### Temperature Range



Up to 130°C (266°F)

# TBK-PP - Directional Drilling Kit

## Product Selection Guide

Product must be installed by following the specific Product Installation Guide.

The product selection chart shown here is intended as a guide for standard products. Consult your Canusa representative for specific projects or unique applications.

Sleeve Operating Characteristics	Celsius	Fahrenheit	TBK-PP-65	TBK-PP
	175°	266°		
	130°	230°		
	110°	194°		
	80°	158°		
	60°	122°		
	40°	86°		
	Pipeline Operating Temp.	°C (°F)		
	Minimum Installation Temp.	°C (°F)		
	Resistance to Circumferential Forces			
			65 (150)	130 (266)
			90 (195)	175 (347)
			excellent	excellent
			excellent	excellent
			excellent	excellent
			FBE, PE,PP, HPCC	PP

## Epoxy Kit Usage

Pipe Diameter (inches)	Kits Required*	Kits Required*	
		2-layer	3-layer
4½	60	1220	3
6.6	115	1520	4
8.6	170	1	4
10¾	230	1	1
12¾	280	1	1
14	315	1	1
16	355	1	2
18	400	1	2
20	450	2	2
24	500	2	2
28	610	2	2
30	710	2	3
36	760	2	3
42	915	2	3
48	1060	3	3

## Application Guidelines

Refer to specific product Installation Guide.

## Canusa Primer Properties

Pot life @ 23°C (73°F)  
20 minutes  
Typical epoxy coated thickness  
4 - 6 mils  
Shelf life @ 23°C, out of sunlight

## Typical Product Properties

Adhesive	Test Standard	Unit	TBK-PP-65	TBK-PP	
	Softening point	ASTM E28	°C (°F)	94 (201)	147 (297)
	Lap shear @ 23°C	DIN 30 672	N/cm²	245	>500
	Lap shear @ 100°C	DIN 30 672	N/cm²	N/A	>150
Backing	Specific gravity	ASTM D792		0.93	0.93
	Tensile strength	ASTM D638	MPa (psi)	28 (4061)	28 (4061)
	Elongation	ASTM D638	%	425	425
	Hardness	ASTM D2240	Shore D	65	65
	Stiffness (2% Secant Modulus)	ASIM D882	PSI	>65,000	>65,000
	Volume Resistivity	ASTM D257	ohm-cm	2 x10 <sup>17</sup>	2 x10 <sup>17</sup>
Sleeve	Impact	NF A 49-711	J	>25	>25
	Indentation (@ 23°C)	NF A 49-711	mm	<0.1	<0.1
	Indentation (@ 110°C)	NF A 49-711	mm	N/A	0.38
	Peel (@ 23°C)	DIN 30 672	N/cm	>200	>150
	Peel (@ 100°C)	NF A 49-711	N/cm	N/A	>80
	Cathodic Disbondment	ASTM G8	mm rad	<3	0
	Water Absorption	ASTM D570	%	0.1	0.1

\* Epoxy Kits Required uses the standard 170 mL Canusa Primer Kit and assumes a 300mm (12") cutback, a 0.25mm (10 mil) epoxy overcoat thickness and a 0.15mm (6 mil) mainline epoxy thickness covering (for 3-layer systems).

## How To Order:

Dimensions & Ordering Info	Ordering Options - TBK-PP - Directional Drilling Kit (TBK-PP-65 is standard product for T < 65°C)	
	TBK-PP-65	TBK-PP
	BK-Black	
	Primary Sleeve - 300, 450, 600mm (12, 18, 24") Sacrificial Sleeve - 150mm (6")	
	55-1525 mm (2-60")	
	Canusa "E" Epoxy	Canusa "P" Epoxy
	1.6 mm (64 mils)	1.6 mm (64 mils)
	1.1 mm (44mils)	1.1 mm (44mils)
	TBK-PP-65	TBK-PP

The above represent standard ordering options.  
Consult your Canusa representative for any unique project requirements.



# CANUSA-CPS

A SHAWCOR COMPANY

### Canada

CANUSA-CPS  
a division of SHAWCOR LTD.  
25 Bethridge Road  
Rexdale, Ontario  
M9W 1M7,  
Canada  
Tel: +1 (416) 743-7111  
Fax: +1 (416) 743-5927

### U.S.A./Latin America

CANUSA-CPS  
a division of SHAWCOR INC.  
2408 Timberloch Place  
Building C-8  
The Woodlands, Texas  
77380, U.S.A.  
Tel: +1 (281) 367-8866  
Fax: +1 (281) 367-4304

### Europe/Middle East

CANUSA-CPS  
a division of Canusa Systems Ltd.  
Unit 3, Sterling Park  
Gatwick Road  
Crawley, West Sussex  
England RH10 9QT  
Tel: +44 (1293) 541254  
Fax: +44 (1293) 541777

[www.canusacps.com](http://www.canusacps.com)

### Asia/Pacific

CANUSA-CPS  
BrederoShaw (S) Pte Ltd  
101 Thomson Road  
#17-01/02, United Square  
Singapore  
307591  
Tel: +65-6732-2355  
Fax: +65-6732-9073

Canusa warrants that the product conforms to its chemical and physical description and is appropriate for the use stated on the installation guide when used in compliance with Canusa's written instructions. Since many installation factors are beyond our control, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection therewith. Canusa's liability is stated in the standard terms and conditions of sale. Canusa makes no other warranty either expressed or implied. All information contained in this installation guide is to be used as a guide and is subject to change without notice. This installation guide supersedes all previous installation guides on this product. E&OE